

## Flat Bar Hanger

The Flat Bar Hanger (FBH) is an effective means of installing smaller widths of Vantrunk cable tray using a central threaded rod hanger. Each flat bar hanger has fixing slots for direct fixing through the bed of the cable tray.

The flat bar hanger has a central hole to suit the use of M10 or M12 threaded rod hangers. Each flat bar hanger has fixing slots for direct fixing through the bed of the cable tray.


The loading table below gives the recommended maximum load for each size of flat bar hanger when used with Vantrunk cable tray and with a uniformly distributed load (UDL) onto the flat bar hanger.

### Flat Bar Hanger

Part Number	Tray Width mm	Dimensions mm			Maximum UDL Kg
		Wa	Wb	H	
AC-FBH-50-O	50	66	40	150	125
AC-FBH-75-O	75	91	40	150	88
AC-FBH-100-O	100	116	40	150	86
AC-FBH-150-O	150	172	40	150	47
AC-FBH-225-O	225	247	40	150	32
AC-FBH-300-O	300	322	40	150	24

○ = Select a Finish & Material

Finishes & Materials:

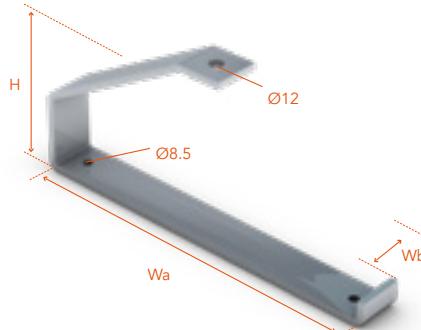

Factor of Safety for Maximum UDL = 1.5