

Adjustable Angle Bracket

LB3 brackets can be used for mounting lighting units at adjustable angles and are fixed to both the sidewall and the base of the cable tray. Supplied Singly.



○ = Select a Finish & Material

Finishes & Materials:

GA SS GX GW


Supplied with:

FIXING SETS x2

Under Slung Bracket

LB4 brackets are used for mounting lighting units directly underneath the cable tray with a drop of 58 mm or at an angle of either 45° or 60°. Supplied Singly.

Minimum width 150mm.

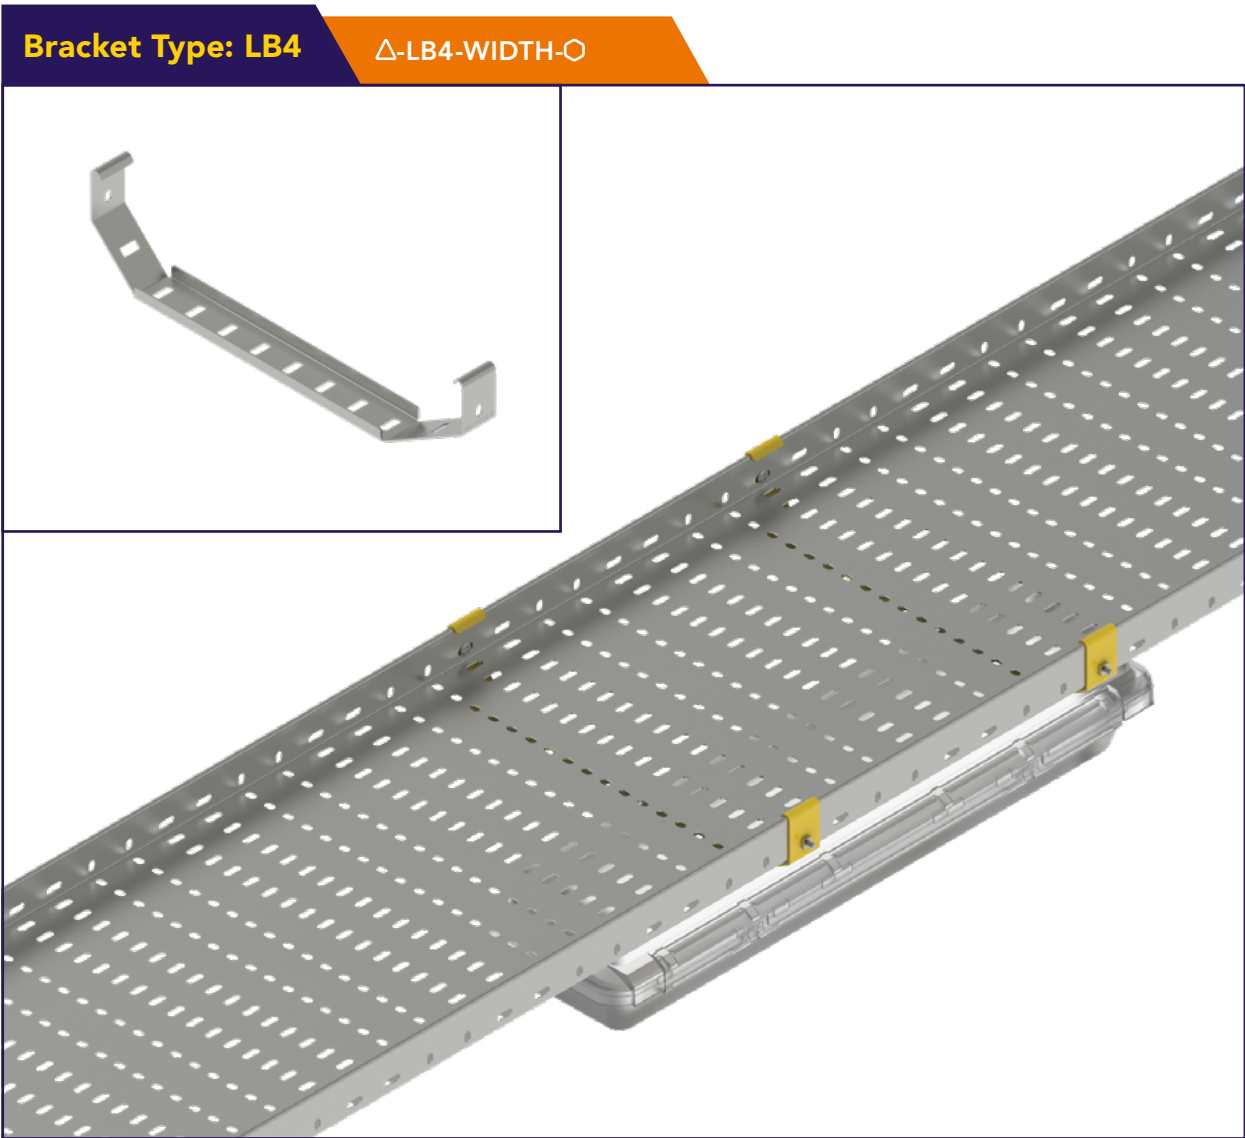

△ = Select a System Type ○ = Select a Finish & Material

Finishes & Materials:

GA SS GX GW

Supplied with:

FIXING SETS x2