


Adjustable Angle Bracket

LB3 brackets can be used for mounting lighting units at adjustable angles and can be fixed to both the sidewall of the cable ladder or on either side of the rung. Supplied singly.

They can also be used in conjunction with **INTELOK**® channel.

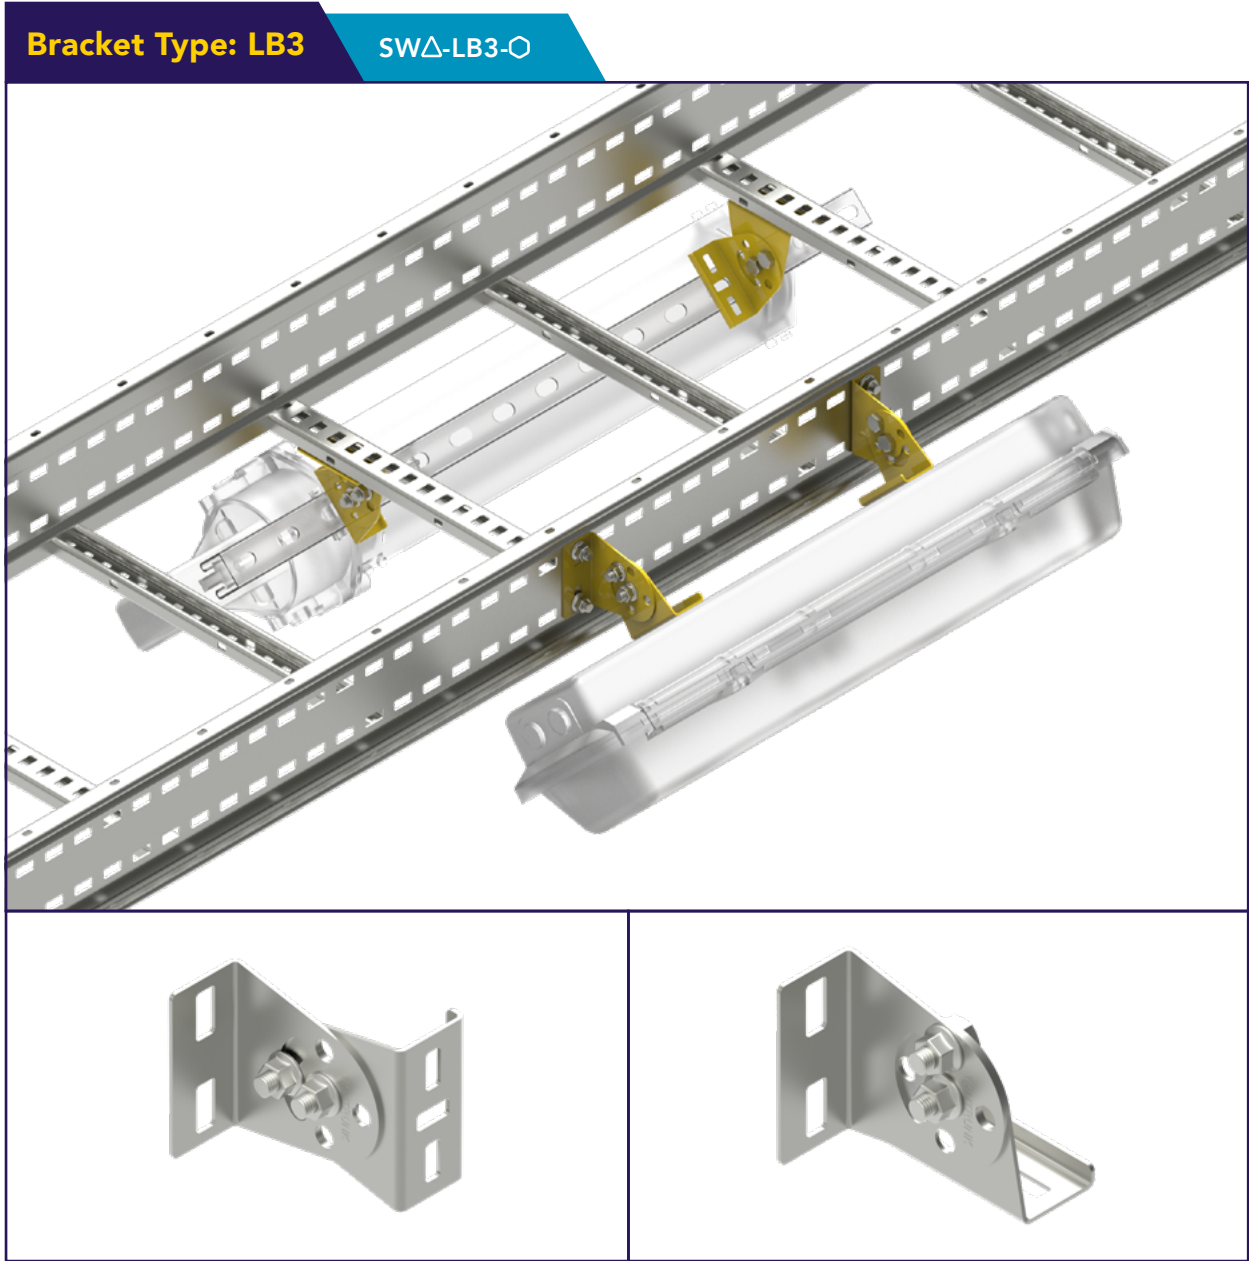

Δ = Select a System Type ○ = Select a Finish & Material

Finishes & Materials:

GA SS GX GW

Supplied with:

FIXING SETS x2

Ancillary Rung Bracket

LB4 brackets can be used to add an additional rung where required to ensure compatibility with a lighting unit mounting pitch. They can be assembled with the continuous open face of the rung either up or down and can be mounted so that the mounting face is flush with the ladders rungs or with a drop of up to 85mm. Supplied singly.



Δ = Select a System Type ○ = Select a Finish & Material

Finishes & Materials:

GA SS GX GW

Supplied with:

FIXING SETS x4