



## Short & Long Adjustable Couplers

Speedway Short and Long Adjustable Couplers are used to create custom reductions in width during installation & to convert equal tees and crosses into unequal tees and crosses when used with a Fitting to Fitting Coupler (FFC).



Speedway Short and Long Adjustable Couplers are supplied singly and come complete with all necessary ladder fixing sets. Each adjustable coupler has 50mm long segments with easibend slots which allow the couplers to be adjusted on site to suit specific installation requirements.

Short adjustable couplers allow reductions of up to & including 150mm per coupler. Long adjustable couplers allow reductions of up to & including 300mm per coupler.

A single short or long adjustable coupler can be used in conjunction with a standard coupler to create an offset connection between two ladders or fittings of differing widths. For concentric reductions, two short or long adjustable couplers are required.

**Coupler Type: SAC & LAC**


**Part Number: SW $\Delta$ -LAC- $\bigcirc$**

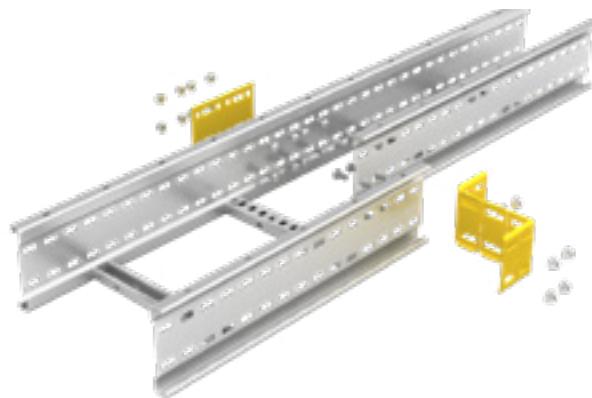

Short Adjustable Coupler SW $\Delta$ -SAC- $\bigcirc$   
Supplied flat



Shown bent to form 150mm width reduction



Long Adjustable Coupler SW $\Delta$ -LAC- $\bigcirc$   
Supplied flat



Shown bent to form 300mm width reduction

$\Delta$  = Select a System Type  $\bigcirc$  = Select a Finish & Material

Finishes & Materials:



Supplied with:

